

38 Series



6.2 mm wide

- EMR - DC, AC or AC/DC coil versions
- SSR - DC or AC/DC input versions
- Screw and Screwless terminal option
- Integrated coil indication and protection circuit
- 35mm DIN-Rail mounting
- 20-way jumper link (093.20)

SPDT - 6A

Single solid state output:
0.1A 1.5V DC...48V DC
2A 1.5V DC...24V DC
2A 12V AC...240V AC


Electromechanical Relay & Socket Combinations

Screw terminals	Screwless terminals	Coil	Contact
38.51.7.012.0050	38.61.7.012.0050	12V DC	SPDT 6A
38.51.7.024.0050	38.61.7.024.0050	24V DC	SPDT 6A
38.51.0.012.0060	38.61.0.012.0060	12V AC/DC	SPDT 6A
38.51.0.024.0060	38.61.0.024.0060	24V AC/DC	SPDT 6A
38.51.0.125.0060	38.61.0.125.0060	125V AC/DC	SPDT 6A
38.51.0.240.0060	38.61.0.240.0060	240V AC/DC	SPDT 6A
38.51.3.125.0060	38.61.3.125.0060	125V AC/DC	SPDT 6A
38.51.3.240.0060	38.61.3.240.0060	240V AC	SPDT 6A

Solid State Relay & Socket Combinations

Screw terminals	Screwless terminals	Coil	Output
38.81.7.024.9024	38.91.7.024.9024	24V DC	2A 1.5..24VDC
38.81.7.024.8240	38.91.7.024.8240	24V DC	2A 12..240VAC
38.81.0.125.9024	38.91.0.125.9024	125V AC/DC	2A 1.5..24VDC
38.81.0.125.8240	38.91.0.125.8240	125V AC/DC	2A 12..240VAC

finder
FINDER RELAYS, INC.
 4191 Capital View Drive
 Suwanee, GA 30024
 Tel: (770) 271-4431
www.findernet.com

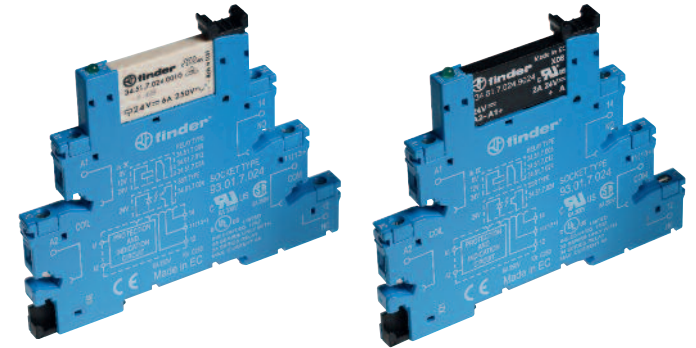

38 Series



6.2 mm wide TIMER

- Timed Interface Module
- 4 functions & 4 time scales 0.1s ... 6h
- EMR - AC/DC (12 or 24V) supply versions
- SSR - AC/DC (24V) supply


SPDT - 6A

Single solid state output:
2A 1.5V DC...24V DC
2A 12V AC...240V AC

Timer Functions:
AI: ON delay
DI: ON pulse
GI: Fixed pulse (0.5s) delayed
SW: Symmetrical recycling: ON start

TIMER

Screw terminals	Screwless terminals	Coil	Output
38.21.0.012.0060	N/A	12V AC/DC	SPDT 6A EMR
38.21.0.024.0060	N/A	24V AC/DC	SPDT 6A EMR
38.21.0.024.9024	N/A	24V AC/DC	2A 1.5..24VDC
38.21.0.024.8240	N/A	24V AC/DC	2A 12..240VAC

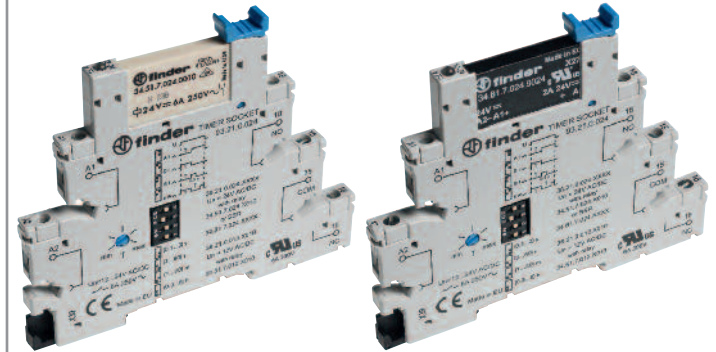

38 Series



14 mm wide

- EMR - DC or AC/DC coil versions
- SSR - DC input versions
- Screw and Screwless terminal options
- Integrated coil indication and protection circuit
- 35mm DIN-Rail mounting
- 8-way jumper link (093.08)

DPDT - 8A

Single solid state output:
5A 1.5V DC...24V DC
3A 12V AC...240V AC

Electromechanical Relay & Socket Combinations

Screw terminals	Screwless terminals	Coil	Contact
38.52.7.024.0050	38.62.7.024.0050	24V DC	DPDT 8A
38.52.0.024.0060	38.62.0.024.0060	24V AC/DC	DPDT 8A
38.52.0.125.0060	38.62.0.125.0060	125V AC/DC	DPDT 8A
38.52.0.240.0060	38.62.0.240.0060	240V AC/DC	DPDT 8A

Solid State Relay & Socket Combinations

Screw terminals	Screwless terminals	Coil	Output
38.31.7.024.9024	38.41.7.024.9024	24V DC	5A 1.5..24VDC
38.31.7.024.8240	38.41.7.024.8240	24V DC	3A 12..240VAC

